



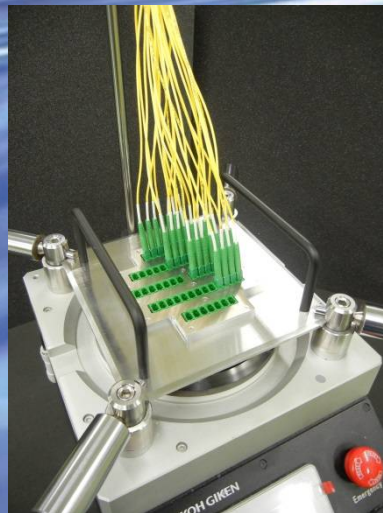

# SEIKOH GIKEN

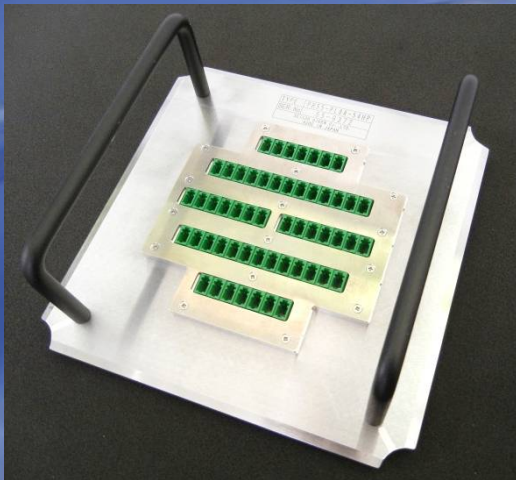

## 54ch. LC/APC Polishing holder

**Polishing Holder : PH55-PL8A-54HP (IPC holder)**

**Polishing Machine : SFP-560A, SFP-550 series**



### ■ Features

- Increase production capacity by 12% from existing LC/APC 48 axis holder
- Further stabilization of endface geometry “Apex offset”
- Inherited “IPC technology” to maintain excellent workability as ever

Polishing Process	Polishing Condition					
	Polishing Pad	Film (service life)	Polishing Liquid	Speed (rpm)	Time (sec)	Clamp Lever Pressure
1	PR5X-500-70	GA5D(3)	PURIFIED WATER	110	20	After 20 turntable revolution
2	PR5X-500-70	DR5D(30)	PURIFIED WATER	110	20	After revolution starts
3	PR5X-500-70	DJ5D(15)	PURIFIED WATER	110	40	After revolution starts
4	PR5X-500-70	XF5D(5)	PURIFIED WATER	110	40	After revolution starts

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES:

North America  
Atlanta, Georgia  
Tel: +1-770-279-6602  
Fax: +1-770-279-8839  
[sales@sg-usa.com](mailto:sales@sg-usa.com)

Europe  
Frankfurt, Germany  
Tel: +49-6102-297-700  
Fax: +49-6102-297-750  
[info@sg-euro.de](mailto:info@sg-euro.de)

Asia  
Matsudo, Japan  
Tel: +81-47-388-6111  
Fax: +81-47-388-4477  
[sales.div@seikoh-giken.co.jp](mailto:sales.div@seikoh-giken.co.jp)

China  
Hangzhou, PROC  
Tel: +86-571-8777-4098  
Fax: +86-571-8777-4099  
[sales@sg-h.cn](mailto:sales@sg-h.cn)

Seikoh Giken reserves the right to improve, enhance and modify features and specifications of Seikoh Giken products without prior notifications



# LC/APC 54ch Polishing Holder polishing result

